



Die Lösung macht den Unterschied.

Product G3000 | CR black 50Sh

Product-Number
G3000

Product-Designation
CR black 50Sh

Manufacturer
WiCo Wichmann, Otto & Cie GmbH + Co. KG

Product
Layout: without inlay
Color: black
Surface: smooth on both side

Description
Soft Neoprene quality, resistant to weathering and ozone, as well as light oil, petrol, weak acids, and diluted bases.



Technical Specification

Material
CR/SBR

Hardness acc. to DIN ISO 7619-1
50 ± 5 °Shore A


Density acc. to DIN EN ISO 1183-1
1,4 g/cm³

Tensile Strength acc. to ISO 37
5 MPa

Elongation at Break acc. to ISO 37
300 %

Operation Temperature Range
-20/+70°C

Stabilities

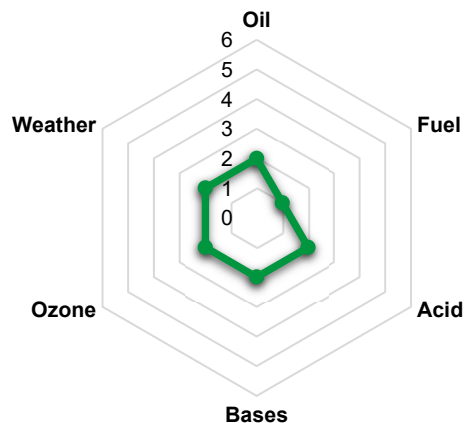

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Available Dimensions

thickness in mm	1	2	3	4	5	6	8	10	12	15	20	25	30	40	50	
length in m	up to 10								up to 5				up to 2,5			
width in mm	up to 1400								up to 1400							

Notes:

May 2021


Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to ± 25%.




Die Lösung macht den Unterschied.

Product Group G30 | CR

Tensile Strength

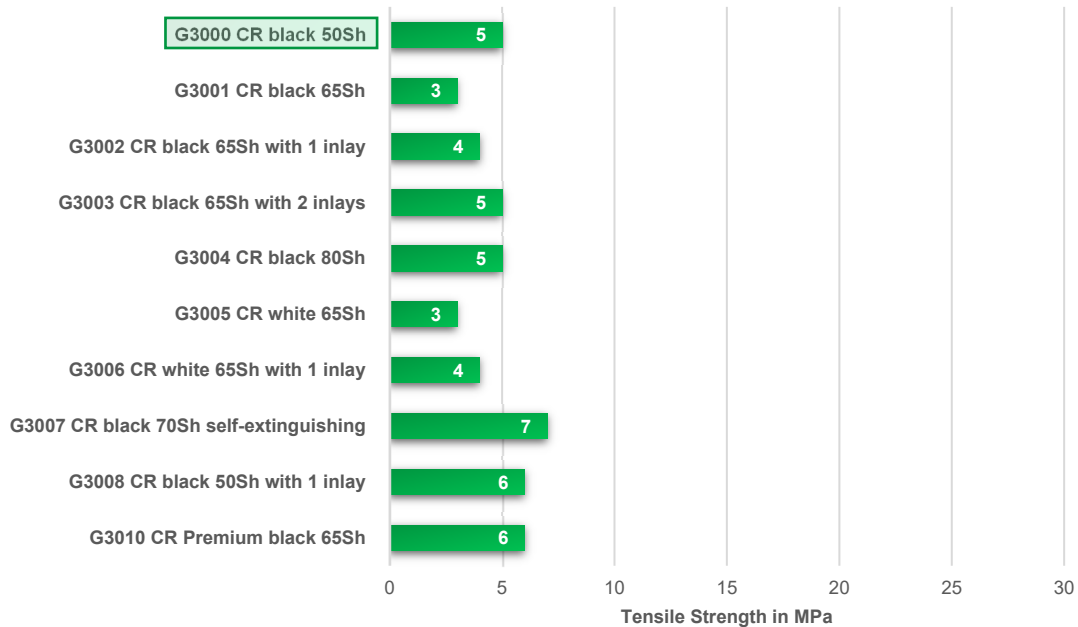

Elongation at Break

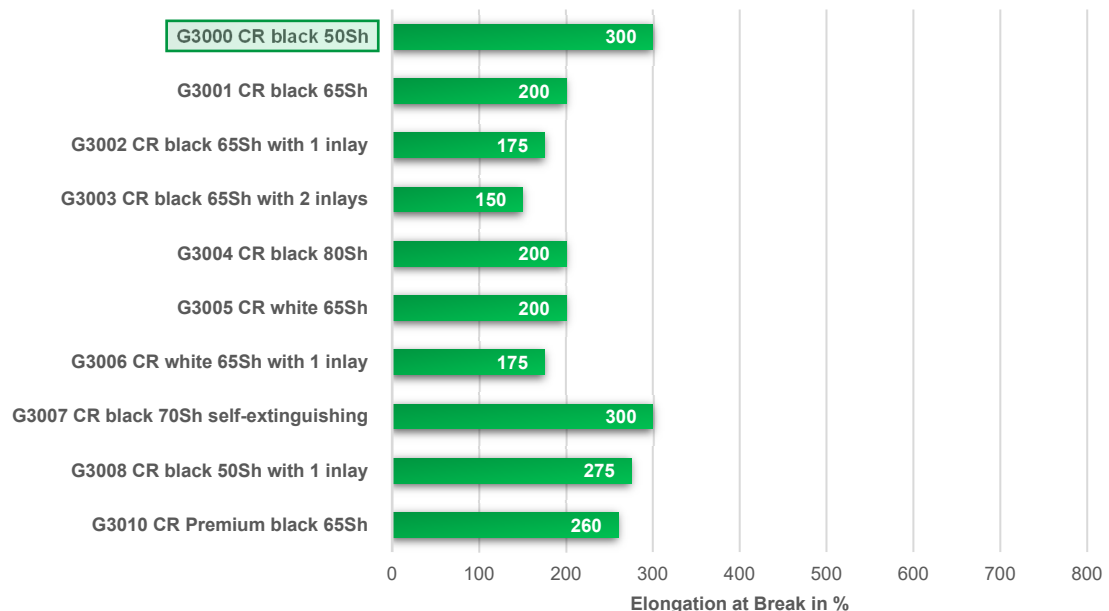

Notes:


May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.




Die Lösung macht den Unterschied.

Operation Temperature Range

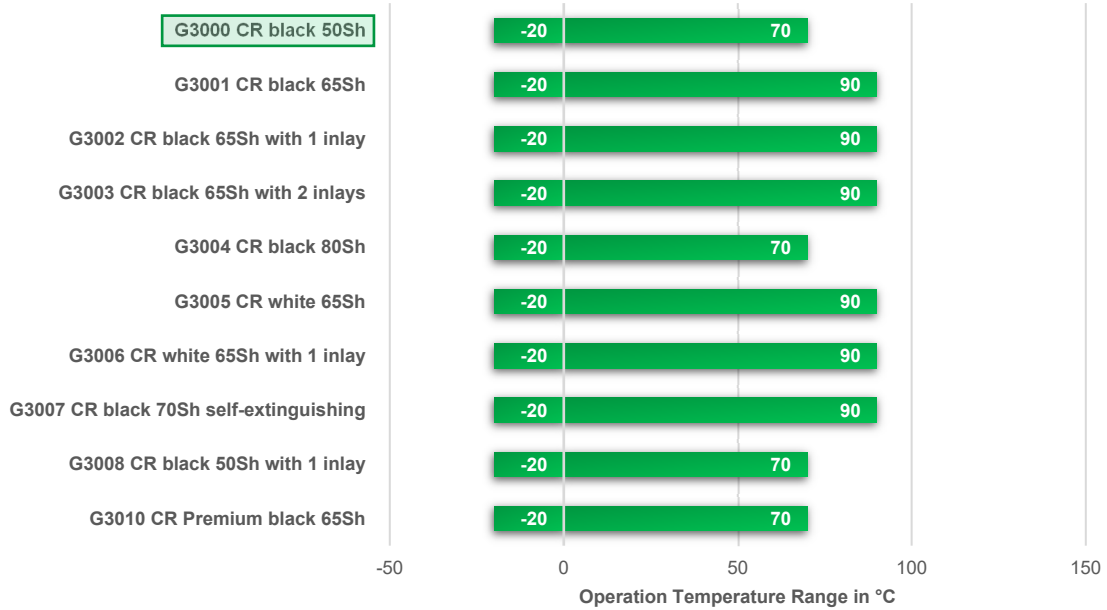

Stabilities

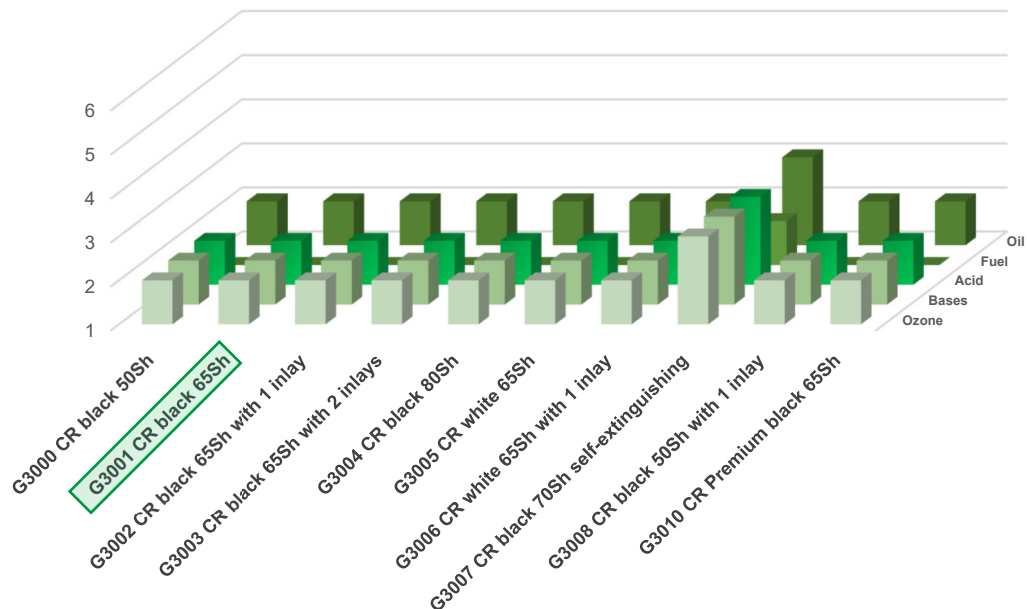

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.