

Die Lösung macht den Unterschied.

Product G5103 | Silicone red 60Sh

Product-Number G5103

Product-Designation Silicone red 60Sh

Manufacturer WiCo Wichmann, Otto & Cie GmbH + Co. KG

Product Layout: without inlay Color: red Surface: smooth on both side

Description

Stabilities

Medium-hard silicone quality with excellent heat and cold resistance and resistance to acids, bases, and ageing.



Technical Specification

Material VMQ


Hardness acc. to DIN ISO 7619-1 60 ± 5 °Shore A

Density acc. to DIN EN ISO 1183-1 1,25 g/cm³

Tensile Strength acc. to ISO 37 7 MPa

Elongation at Break acc. to ISO 37 350 %

Operation Temperature Range -60/+250 °C



6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Available Dimensions

thickness in mm	1	2	3	4	5	6	8	10
length in m	up to 10							
width in mm	up to 1200							

Notes:

May 2021


Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.




Die Lösung macht den Unterschied.

Product Group G51 VMQ

Tensile Strength

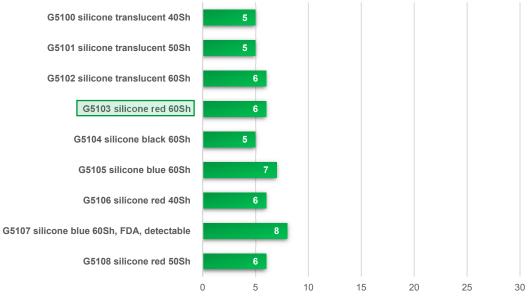

Tensile Strength in MPa

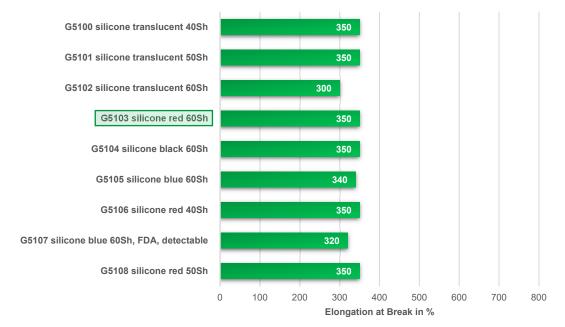

Elongation at Break

Notes:


May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.




Die Lösung macht den Unterschied.

Operation Temperature Range

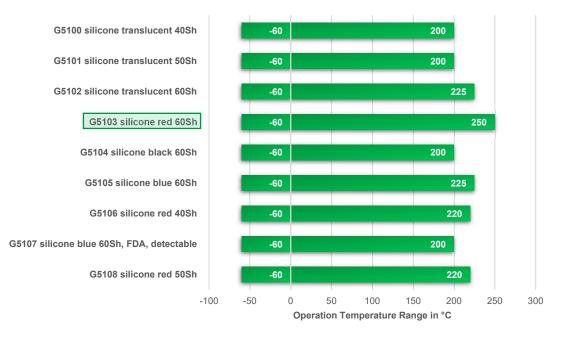

Stabilities

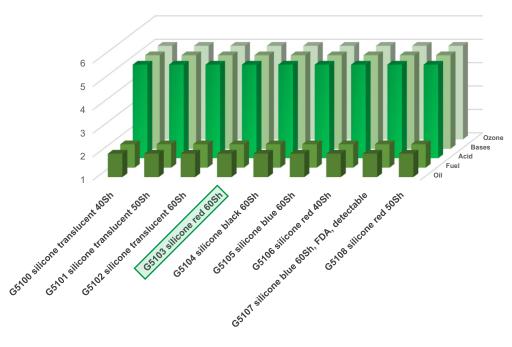

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.