



Die Lösung macht den Unterschied.

Product G0714 | EPDM black 30Sh

Product-Number
G0714

Product-Designation
EPDM black 30Sh

Manufacturer
WiCo Wichmann, Otto & Cie GmbH + Co. KG

Product
Layout: without inlay
Color: black
Surface: smooth on both side


Description
Soft EPDM quality, resistant to weathering and ozone, as well as weak acids, and diluted bases.



Technical Specification

Material
EPDM
Hardness acc. to DIN ISO 7619-1
30 ± 5 °Shore A
Density acc. to DIN EN ISO 1183-1
1,03 g/cm³
Tensile Strength acc. to ISO 37
8,5 MPa
Elongation at Break acc. to ISO 37
700 %
Rebound Resilience acc. to DIN 53512
35 %
Abrasion Resistance acc to. DIN ISO 4649
299 mm³
Operation Temperature Range
-25/+100 °C

Stabilities

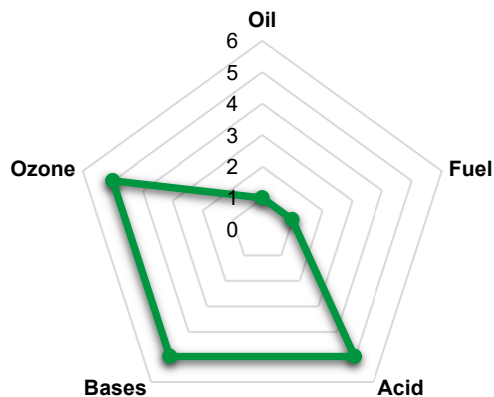

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Available Dimensions

thickness in mm	1	2	3	4	5	6	8	10
length in m	up to 10							
width in mm	up to 1400							

Notes:

May 2021


Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to ± 25%.




Die Lösung macht den Unterschied.

Product Group G07 | EPDM

Tensile Strength

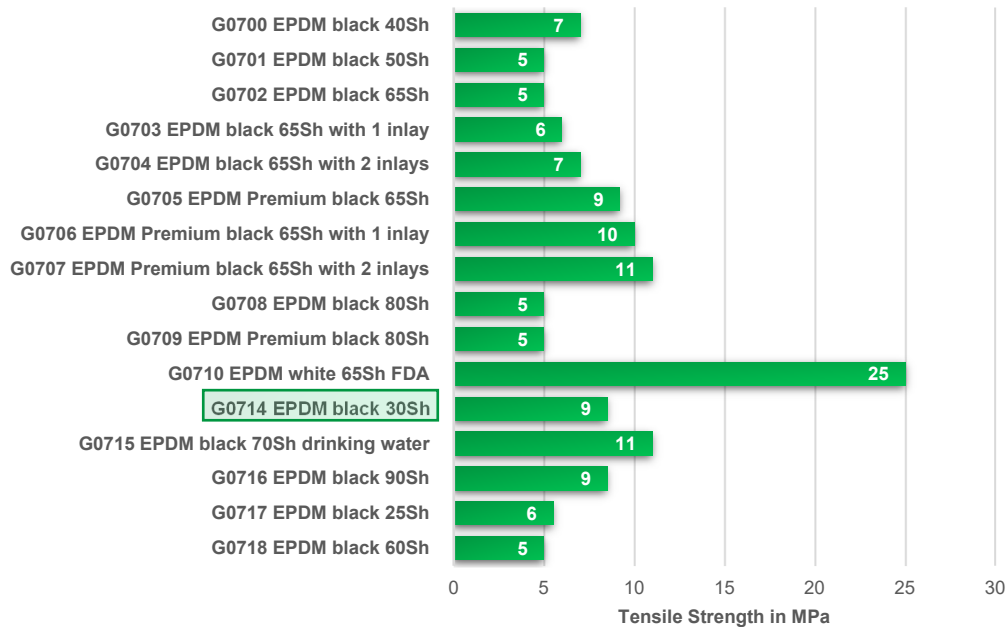

Elongation at Break

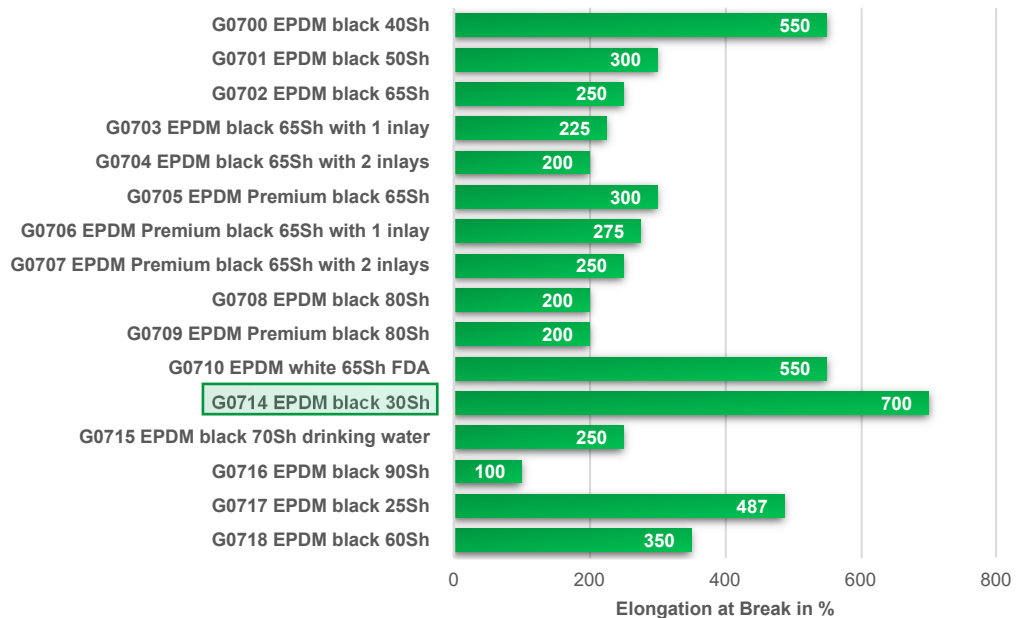

Notes:


May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.




Die Lösung macht den Unterschied.

Operation Temperature Range

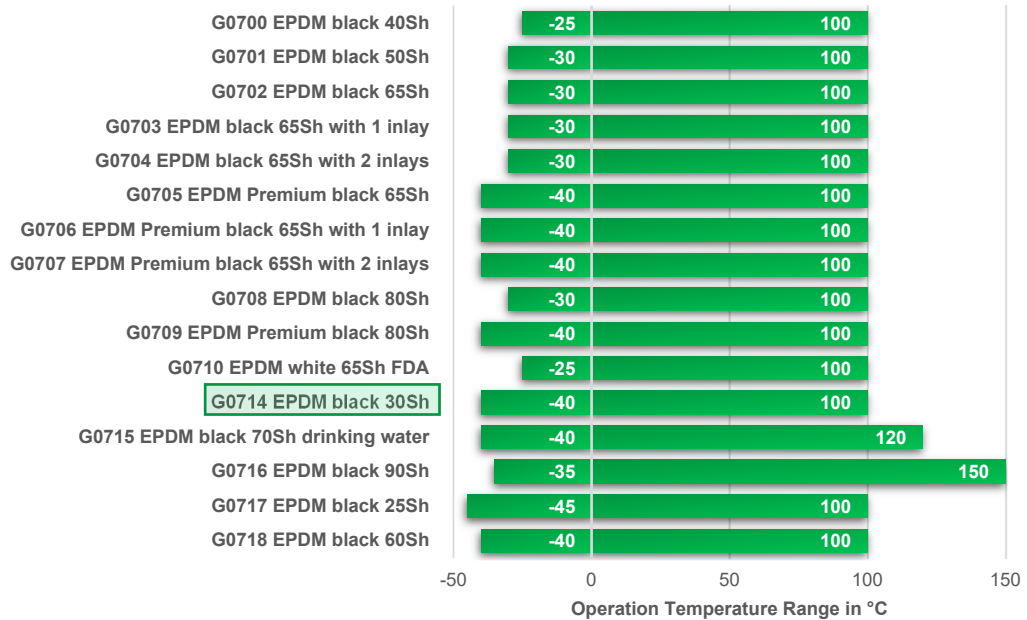

Stabilities

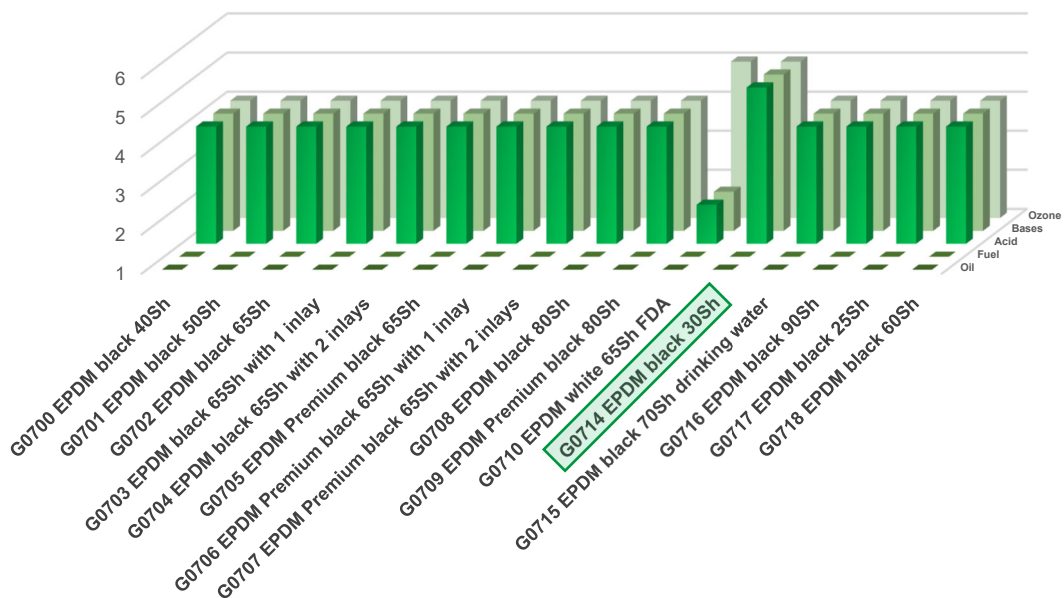

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.