



Die Lösung macht den Unterschied.

# Product G4001 | NR/SBR black 65Sh

**Product-Number**  
G4001

**Product-Designation**  
NR/SBR black 65Sh

**Manufacturer**  
WiCo Wichmann, Otto & Cie GmbH + Co. KG

**Product**  
Layout: without inlay  
Color: black  
Surface: smooth on both side

**Description**  
Medium-hard NR/SBR quality with excellent mechanical properties.



## Technical Specification

**Material**  
NR/SBR

**Hardness acc. to DIN ISO 7619-1**  
65 ± 5 °Shore A


**Density acc. to DIN EN ISO 1183-1**  
1,5 g/cm<sup>3</sup>

**Tensile Strength acc. to ISO 37**  
3 MPa

**Elongation at Break acc. to ISO 37**  
200 %

**Operation Temperature Range**  
-20/+70 °C

## Stabilities

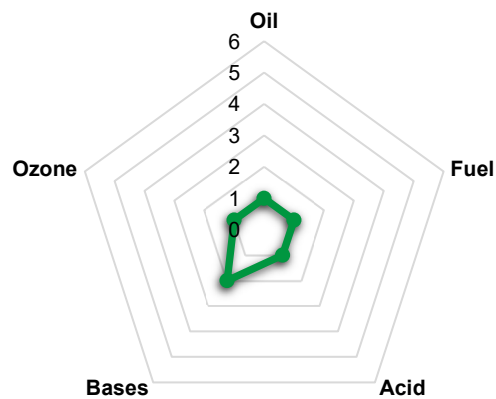

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

## Available Dimensions

thickness in mm	1	2	3	4	5	6	8	10	12	15	20	25	30	40	50
length in m	up to 10								up to 5					up to 2,5	
width in mm	up to 1400								up to 1400						

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to ± 25%.




Die Lösung macht den Unterschied.

## Product Group G40 | NR/SBR

### Tensile Strength



### Elongation at Break

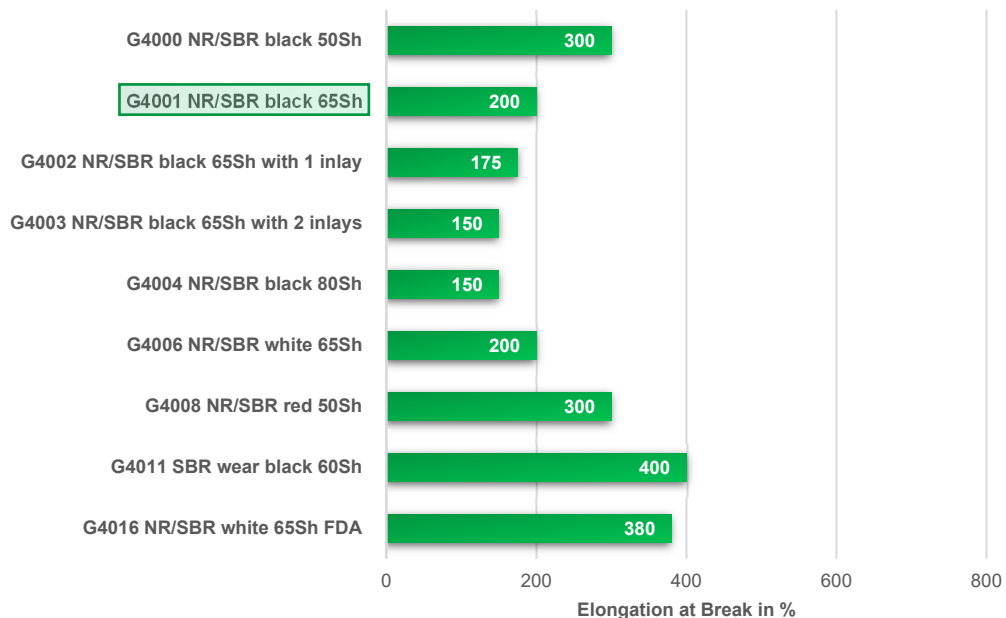

#### Notes:


May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to  $\pm 25\%$ .




Die Lösung macht den Unterschied.

## Operation Temperature Range

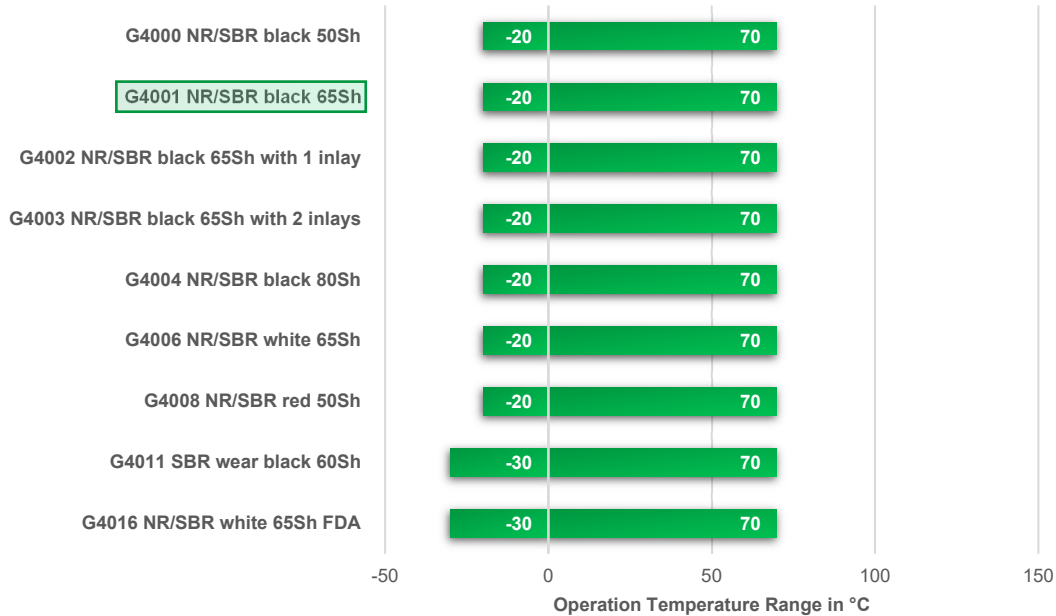

## Stabilities

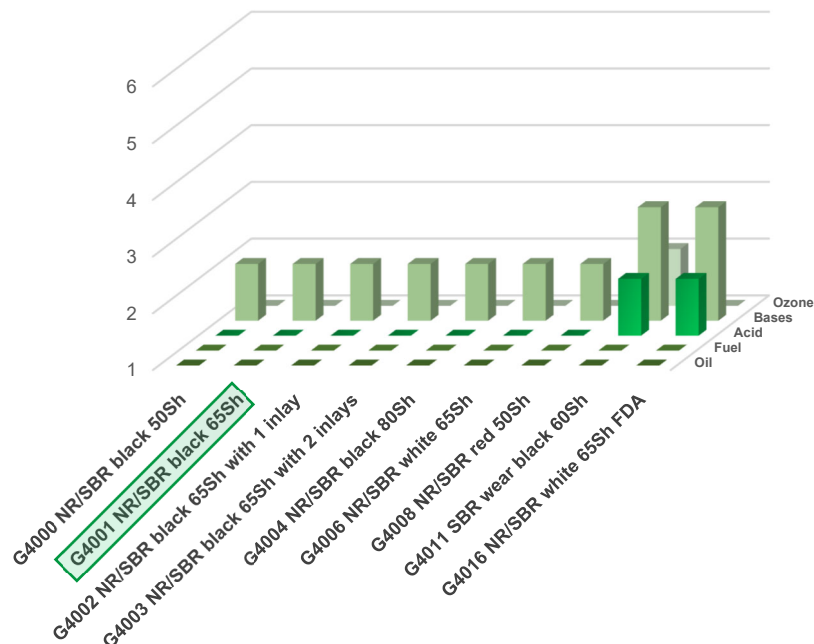

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to  $\pm 25\%$ .