



Die Lösung macht den Unterschied.

Product Z0720 | EPDM cellular rubber black sheets


Product-Number
Z0720

Product-Designation
EPDM cellular rubber black sheets

Manufacturer
WiCo Wichmann, Otto & Cie GmbH + Co. KG

Product
Composition: closed cell
Color: black
Layout: without or one-sided adhesive
as assembling aid

Description
Foamed EPDM quality, resistant to weathering and ozone, as well as acids and bases.



Technical Specification

Material
EPDM

Bulk Density acc. to DIN EN ISO 845
140 kg/m³

Tensile Strength acc. to ASTM D 412
0,6 MPa

Elongation at Break acc. to ASTM D 412
150 %

Linear shrinkage at RT
< 2 %


Compression Hardness acc. to ASTM D 1056
50 – 60 kPa

Compression Set acc. to ASTM D 1056
30 % (22 h / 23 °C)

Water Absorption acc. to ASTM D 1056
< 3 %

Operation Temperature Range
-30/+80 °C

Stabilities

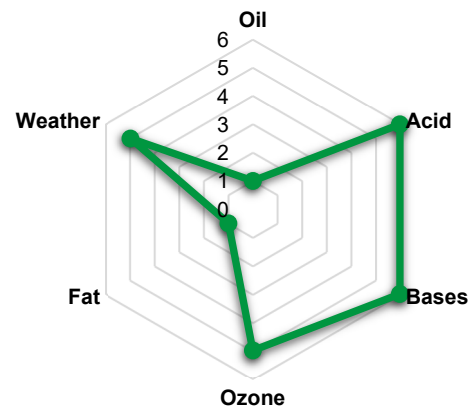

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to ± 25%.