



Die Lösung macht den Unterschied.

Product G3007 | CR black 70Sh self-extinguishing

Product-Number
G3007

Product-Designation
CR black 70Sh self-extinguishing

Manufacturer
WiCo Wichmann, Otto & Cie GmbH + Co. KG

Product
Layout: without inlay
Color: black
Surface: smooth on both side


Description
Medium-hard Neoprene quality, resistant to weathering and ozone, as well as light oil, petrol, weak acids, and diluted bases.



Technical Specification

Material
CR
Hardness acc. to DIN ISO 7619-1
70 ± 5 °Shore A
Density acc. to DIN EN ISO 1183-1
1,5 g/cm³
Tensile Strength acc. to ISO 37
7 MPa
Elongation at Break acc. to ISO 37
300 %
Self-Extinguishing acc. to at ISO 4589-2
O₂-Index up to 30 %
Operation Temperature Range
-20/+90°C

Stabilities

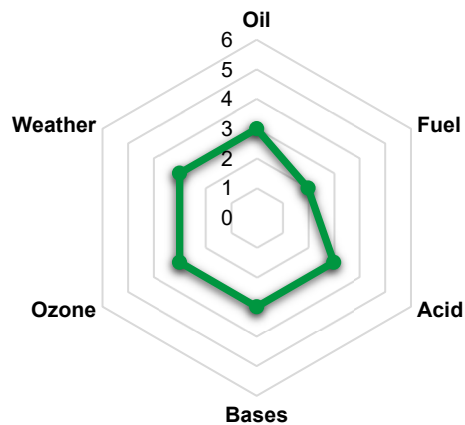

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately; 1 nonresistance.

Available Dimensions

thickness in mm	1	2	3	4	5	6	8	10
length in m	up to 10							
width in mm	up to 1400							

Notes:

May 2021


Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to ± 25%.




Die Lösung macht den Unterschied.

Product Group G30 | CR

Tensile Strength

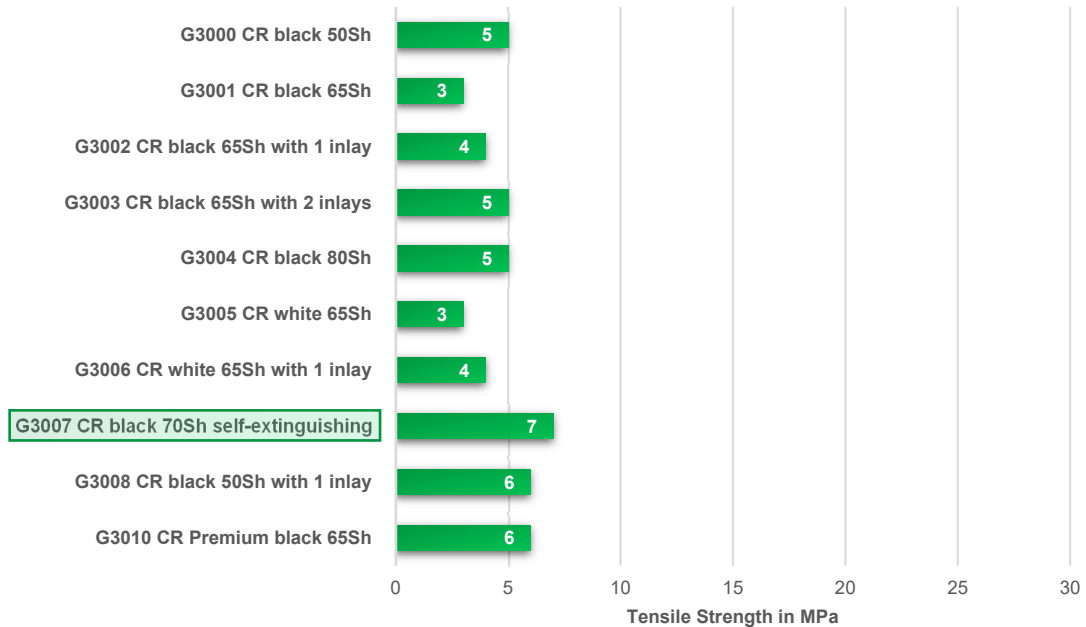

Elongation at Break

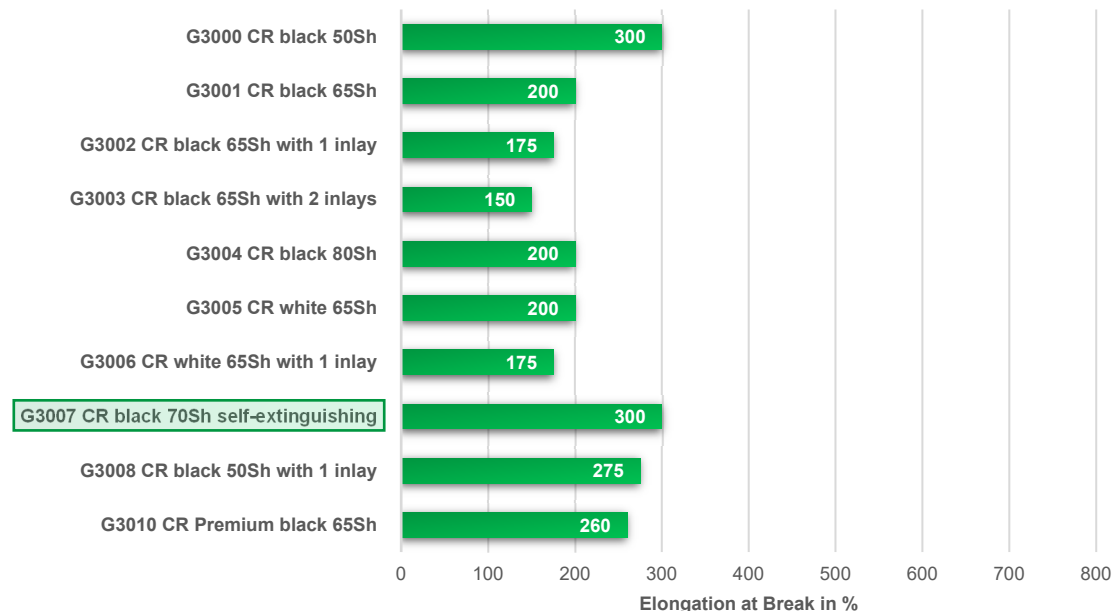

Notes:


May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.




Die Lösung macht den Unterschied.

Operation Temperature Range

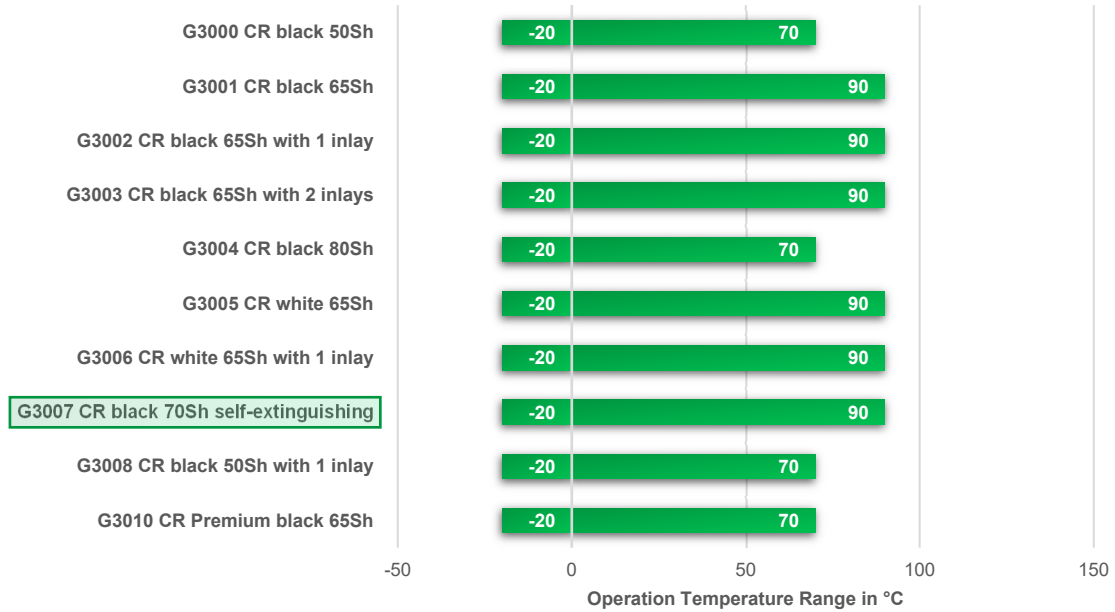

Stabilities

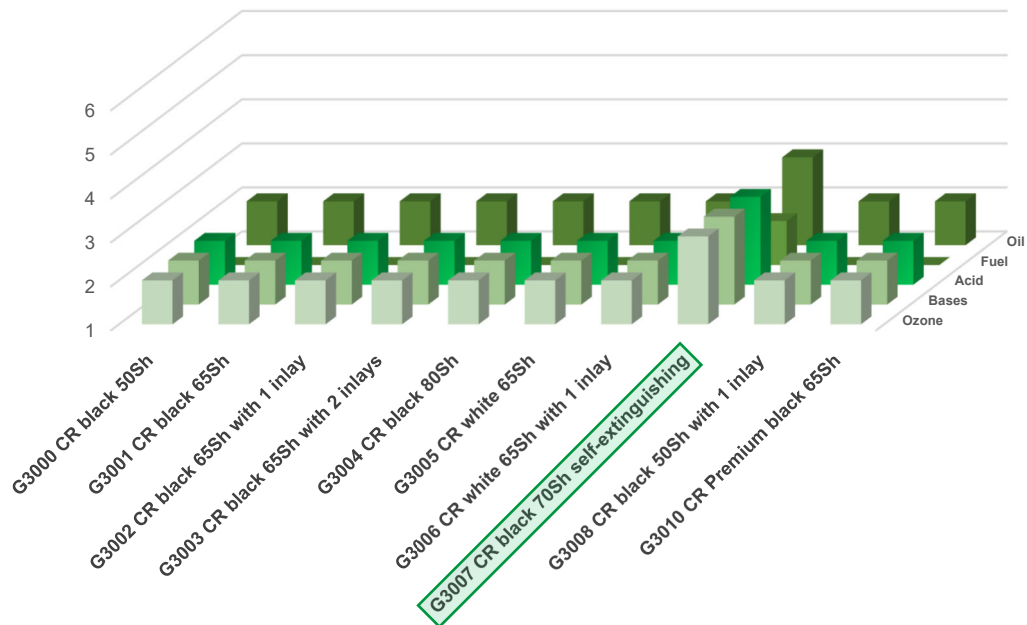

6: excellent; 5: very good; 4: good; 3: medium; 2: moderately.; 1 nonresistance.

Notes:

May 2021

Our advice is given to the best of our knowledge, but only as a non-binding reference and does not exempt our own examination of the products supplied by us for their suitability for the intended procedures and purposes. The specified technical data are guide values, i.e., experience values from longer production periods. The processing of our products is beyond our control and is therefore exclusively within your area of responsibility. Of course, we guarantee the perfect quality of our products according to our general sales and delivery conditions. Due to raw material and production, as well as by external influences (temperature, humidity, etc.), the stated values can fluctuate by up to $\pm 25\%$.